

1007 Rec'd PCT/PTO 20 FEB 2002.

FORM PTO-1390 (REV 10/95)		U. S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER  COLB 203
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U. S. APPLICATION NO. (IF KNOWN, SEE 37 CFR <b>10/069253</b>
INTERNATIONAL APPLICATION NO. PCT/IL00/00481	INTERNATIONAL FILING DATE 7 August 2000	PRIORITY DATE CLAIMED 24 August 1999	
TITLE OF INVENTION VOLUME HOLOGRAMS IN TRANSPARENT MATERIALS			
APPLICANT(S) FOR DO/EO/US GULETSKY, DMITRIEV and OSHEMKOW			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is the FIRST submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(I).</li> <li>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau.)</li> <li>b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li>10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>			
Items 11. to 16. below concern document(s) or information included:			
<ol style="list-style-type: none"> <li>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</li> <li>14. <input type="checkbox"/> A substitute specification.</li> <li>15. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>16. <input type="checkbox"/> Other items or information:</li> <li>17. <input type="checkbox"/> The follow fees are submitted</li> <li>18.</li> </ol>			

RECEIVED

26 APR 2002

Legal Staff  
International Division

10/069253

JC19 Rec'd PCT/PTO 20 FEB 2007

**BASIC NATIONAL FEE (37 CFR 1.492(A)(1) - (5)):**

Search Report has been prepared by the EPO or JPO ..... \$860.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
..... \$690.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482)  
but international search fee paid to USPTO (37 CFR 1.445(a)(2)) . . . \$710.00

Neither International preliminary examination fee (37 CFR 1.482) nor  
international search fee (37 CFR 1.445(a)(2)) paid to USPTO . . . . \$1000.00

International preliminary examination fee paid to USPTO (37 CFR 1.482)  
and all claims satisfied provisions of PCT Article 33(2)-(4) . . . . . \$100.00

**ENTER APPROPRIATE BASIC FEE AMOUNT =**

\$860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$130.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE
Total claims	8 - 20 =	0	x \$22.00
Independent	1- 3 =	0	x \$78.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$250.00

\$ 0

\$ 0

\$

**TOTAL OF ABOVE CALCULATIONS =**

\$860

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement  
must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

\$495.00

**SUBTOTAL =**

\$495.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$0

**TOTAL NATIONAL FEE =**

\$ 495.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property-

\$

**TOTAL FEES ENCLOSED =**

\$ 495.00

Amount to be:  
refunded

\$

charged

\$

- a. ☐ A check in the amount of \$\_\_\_\_\_ to cover the above fees is enclosed
- b. ☒ Please charge my Deposit Account No. 50-0624 in the amount of \$495.00 to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit  
Account No. 50-0624. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a)  
or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO  
James R. Crawford  
FULBRIGHT & JAWORSKI L.L.P.  
666 Fifth Avenue  
New York, NY 10103  
Customer No. 24972

SIGNATURE

James R. Crawford

NAME

39,155

REGISTRATION NUMBER

COLB-203

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : GULETSKY, et al.  
Serial No. : To Be Assigned  
Filing Date : Herewith  
For : VOLUME HOLOGRAMS IN TRANSPARENT MATERIALS

February 20, 2002

Hon. Commissioner of Patents  
and Trademarks  
Washington, D.C. 20231

PRELIMINARY AMENDMENT

SIR:

In advance of prosecution, please amend the above-identified patent application as follows:

IN THE CLAIMS:

Cancel pending claims 1-8 without prejudice, and add the following new claims:

9. A method of producing in a solid transparent material, a hologram of an object, comprising the steps of:

developing a three-dimensional mathematical model of an electro-magnetic field emanating from said object, said field producing an image of said object;

computing a corresponding three-dimensional set of points, light scattered from which reconstructs said field; and

focusing a pulsed laser beam into said solid transparent material onto each of said points sequentially, said beam being capable, when focused, of causing optical breakdown damage in said solid transparent material.

10. The method of claim 9, wherein said object is a real object.

11. The method of claim 9, wherein said object is a virtual object.

12. The method of claim 9, also including the step of arranging said set of points as a set of diffraction lattices.

**COLB-203**

13. The method of claim 12, wherein said set of diffraction lattices are such that light diffracted therefrom forms a three-dimensional colored image.

14. The method of claim 12, wherein said set of diffraction lattices are such that light diffracted therefrom forms a stereo image.

15. The method of claim 12, wherein said set of diffraction lattices are such that light diffracted therefrom forms an image capable of being viewed from a plurality of angles.

16. The method of claim 9, wherein said set of points are arranged as a holographic optical element.


**REMARKS**

Please enter this amendment. If any fees are due to enter this amendment or to enter any other documents or to otherwise maintain pendency of this application, authorization is granted to charge such fees to Deposit Account No. 50-0624.

Respectfully submitted,

**FULBRIGHT & JAWORSKI L.L.P.**

By

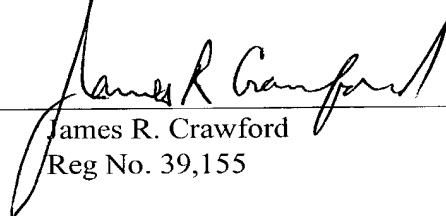  
James R. Crawford  
Reg No. 39,155

666 Fifth Avenue  
New York, N.Y. 10103  
(212) 318-3000

VOLUME HOLOGRAMS IN TRANSPARENT MATERIALS

## FIELD OF THE INVENTION

The present invention relates to the field of the production of volume holograms in transparent materials, especially by means of digital laser engraving at very high energy densities.

## BACKGROUND OF THE INVENTION

An object can be seen if it reflects, scatters or radiates light. This light can be described by a set of waves of an electromagnetic field. If the same electromagnetic field, called hereinafter in this specification, the model field, were to be recreated by other means, an observer would see the same image. The simplest way of creating a copy of a model field is by means of a photograph. This method provides a copy of the field intensity distribution in the lens focal plane, but does not save the field phase distribution. Phase distribution contains information about location in object space. That is why a true image can be seen only from one viewpoint.

A method of preserving this phase information in the copy of the model field is by means of a hologram. The first holograms were formed by Gabor in research on reducing the aberrations in electron microscopes. A simple hologram can be produced by illuminating the object with coherent light, and using the same light as a reference field to produce an interference pattern inside the photographic recording material. Under the appropriate conditions, the resulting photograph will memorize both the intensity and phase information of the model field. In conventional holography, this information is read using the same beam of coherent light as was used for the reference light.

Let  $U(\vec{r}) = u(\vec{r})e^{i(v(\vec{r}) - \omega t)}$  represent the field reflected or scattered by the object, the model field, and

let  $U^0(\vec{r}) = u^0 e^{i(\vec{k}^0 \vec{r} - \omega t)}$  represent the plane reference field, where:

$\vec{r}$  is the radius vector,

WO 01/14937

PCT/IL00/00481

$\vec{k}^0$  is the wave vector,

$\omega$  is the frequency,

$v(\vec{r})$  is the phase, and

$u(\vec{r})$  is the amplitude of the model field.

The resulting field on the surface of the photograph is given by:

$$\Phi(x, y) = u(x, y)e^{i(v(x, y) - \omega t)} + u^0 e^{i(k_x^0 x + k_y^0 y - \omega t)}$$

and the average intensity of field is given by:

$$I(x, y) = u(x, y)^2 + (u^0)^2 + u(x, y)u^0 (e^{i(v(x, y) - k_x^0 x + k_y^0 y)} + e^{-i(v(x, y) + k_x^0 x + k_y^0 y)})$$

where:

$x$  and  $y$  are the co-ordinates of the point on the two-dimensional photograph where the field is calculated,

$u(x, y)$  is the projection of  $u(\vec{r})$  onto the plane of the photograph, and

$k_x$  and  $k_y$  are the projections of the wave vector onto the  $x$ - and  $y$ -axes.

Assuming that the transparency of the resulting holographic photograph is proportional to the square of the exposure. When illuminated by the reference field  $U^0(\vec{r})$ , three waves result, as is well known in the art. The first is a simple forward-scattered wave, the modulated reference field. The second is a virtual image, normal to the surface of the photo. The third is a copy of the required model field.

Mathematically, the resulting holographic photograph of the interference pattern can be considered to be a Fourier representation of the model field. The model field is generated by interference of the reference light beam with the hologram. The resulting image is produced in practice, by light scattered from a predefined set of tiny crystals within the hologram photographic recording material, each with different size and density.

Holographic images are three dimensional and remarkably realistic. The original uses of holography in imaging and display applications has now grown to include applications such as optical, RF and acoustic filtering, holographic image processing, holographic or diffractive optical elements including lenses, aspherical optics, beam splitters and aberration correctors, night vision devices, helmet displays, memory devices, phase contrast microscopy, optical disc readouts and many others.

The problem with the prior art conventional method of producing holograms on photographic recording materials, is that it requires the use of a complex optical set-up, with coherent writing and reading beams for respectively producing and displaying the holograms. A number of methods and apparatus have been described in the prior art for producing holograms using light-sensitive materials. For example, U.S. Patent No. 5,291,317 on "Holographic diffraction grating patterns and methods for creating the same" to C Newswanger describes methods and apparatus for creating a plurality of holographic diffraction grating patterns in a raster scan fashion. U.S. Patent No. 5,592,313 on "Methods and apparatus for making holograms including a variable beam splitter assembly" and U.S. Patent No. 5,745,267 on "Apparatus for making holograms", to S.J. Hart describe methods for producing composite holograms using substantially planar, photo-sensitive substrates. A real-time holography system using a CCD camera as the photo-sensitive recording medium, is described by N. Hashimoto in U.S. Patent No 5,515,183 "Real time holography system".

Furthermore, such holograph production methods require either the presence of the object sample itself, or involve a complicated method of wave construction for synthetically reconstructing the object beam. This wave reconstruction could include beam splitting, amplitude transformation, phase processing, followed by recombination of the reconstructed object beam with the reference beam to form the interference pattern. This has limited the use of holograms, because of the complexity and high precision of the optical equipment required to produce them. There is therefore a widespread need for a novel method of producing holograms in transparent materials, without the need for complicated optical interference arrangements, thereby reducing the complexity and cost of production of such holograms.

Computer generated holograms, hereinafter CGH's, have been described by B.R.Brown and A.W.Lohmann in the article "Complex Spatial Filtering with Binary Masks", published in Applied Optics, Vol. 5, p. 967ff, (1966). The CGH's described therein were used for optical spatial filtering. The hologram is represented by assigning field values to discrete pixels. The number of values is dependent on the size of the image and its resolution. Pixel values can be calculated by means of scalar diffraction theory and form a Fourier transform of the model field. In evaluating the Fourier series, some

WO 01/14937

PCT/IL00/00481

approximations are necessary. One of these approximations, known as the Detour phase error, has given its name to a common CGH variant. Other approaches have also been developed and the resulting holograms known as Nondetour Holograms. Some such CGH's are described in the article entitled "Binary Synthetic Holograms" by W.H. Lee published in Applied Optics, Vol. 13, p. 1677ff, (1974).

Three main features of a CGH should be emphasized:

- (a) neither object nor reference field need really exist, such that any convenient mathematical representation of the object and any reference wave front can be utilized;
- (b) the calculation is essentially the evaluation of the inverse diffraction effect, in that the diffracted field is given and the pixel values of the holograph need to be calculated;
- (c) the mathematical nature of a CGH enables the construction of idealized images and filters, by means of compensation for such effects as beam aberrations, system noise, beam divergence, beam phase shift, and others.

A number of different artifacts and aliases are produced as a result of the discrete nature of defining the value assigned to each pixel, such as because of the finite number of pixel positions, their coherent positioning and the quantization of the pixel values. Such effects are well documented in the prior art, in a number of publications, such as "The Effect of Finite Sampling in Holography", by W.T.Cathey, in Optik, Vol. 27, p. 317ff, (1968), "Aliasing Error in Digital Holography" by J.Buklew and N.C.Galaher, in Journal of Applied Optics. Vol. 15, p. 2183ff, (1976); "Some Effects of Fourier Domain Phase Quantization" by J.W Goodman and A.M.Silvestri, in IBM Journal of Research and Development, Vol. 14, p. 478ff, (1970); and "Quantization Noise in Binary Holograms" by P.S.Naidu, in Optics Communications, Vol. 15, p. 361ff, (1975).

Specific mathematical techniques have been described, for reducing these effects, such as those described by B.R.Brown and A.W.Lohmann in "Computer Generated Binary Holograms", published in the IBM Journal of Research and Development, Vol. 13, p.168ff, (1969), and by J.Buklew and N.C.Galaher, Jr., in "Comprehensive Error Models and a Comparative Study of Some Detour Phase Holograms", published in Applied Optics, Vol. 18, p.2861ff, (1979).

The main limitation of prior art CGH's is that they can only be constructed using two dimensional recording techniques, such as surface chemical etching, lithography, ion



etching, electron beam processing and silk screen printing. Hence such a CGH represents only a two dimensional slice of a complete volumetric interference pattern. As has been shown by Yu. N. Denisyuk in the article "Optical Properties of an Object as Mirrored in the Wave Field of its Scattered Radiation", published in Optics and Spectroscopy, Vol. 15, pp. 522-532, (1963), unlike the case of three-dimensional volume holograms, for such a 2-D holograph, this means that there is no difference between direct and inverse wave propagation, that a virtual image always exists, and that there is no wavelength selectivity. Consequently, such a CGH is limited and can produce only a monochrome image or holographic optical element, HOE.

There therefore exists a serious need for a method of production of computer generated volume holograms, which overcome the disadvantages and drawbacks of prior art holograms.

The disclosures of all publications mentioned in this section and in the other sections of the specification, and the disclosures of all documents cited in the above publications, are hereby incorporated by reference.

## SUMMARY OF THE INVENTION

The present invention seeks to provide a new method of producing volume holograms in transparent materials, by creating inside the material a set of scattering centers, which produce a copy of the required model field by diffraction of illuminating light therefrom. The position of every point of this set of scattering centers is computed, in order to solve the problem of the inverse reconstruction of the required model field by means of a set of secondary waves of scattered light. This can be performed in a direct way, for example by use of a commercial ray-tracing program, such as the Honeywell Ray-tracing CAD, manufactured by Honeywell Systems and Research Center of Minneapolis, MN, USA, or by use of the genetic algorithm method described by D. Brown and A. Kathman in the article "Multi-element diffractive optical designs using evolutionary programming", published in SPIE, Vol. 2404, pp.17-27,(1995).

Alternatively and preferably, this computation can be performed in an indirect



CGVH, constructed and operative according to the present invention, enables the production of achromatic HOE's and of fully colored images.

There is thus provided, in accordance with a preferred embodiment of the present invention, a method for producing computer generated intravolume holograms inside transparent materials by means of the controlled production of scattering centers through optical breakdown in the material resulting from the focusing of high intensity laser pulses.

The method involves the focusing of the beam from a laser emitting ultra-short pulses of the order of tens of picoseconds or less, into the volume of the transparent material by means of a high quality objective lens, such that a focal spot close to the diffraction limit for the laser wavelength is obtained within the material. At very high power densities, of the order of  $10^{15}$  Watts/cm<sup>2</sup>, the material undergoes optical breakdown, since the power density of the focused beam far exceeds the threshold above which non-linear effects occur in the transmission properties of the otherwise transparent materials, and the material strongly absorbs the focused beam. Because of the intense power density, atomic and molecular bonds of the material are broken down, and the material decomposes almost instantaneously into its basic components, generally highly ionized component atoms, leaving behind a tiny diffuse scattering center. The production of such optical breakdown damage centers has been described in Russian Patent No. RU 2,008,288 to S.V. Oshemkov, one of the current applicants, entitled "Process for Laser Forming of Images in Solid Media", hereby incorporated by reference. The term pixel is used herewithin to denote the optical breakdown damage zone constituting such a scattering center.

The accuracy of the arrangement of pixels inside a transparent material depends on the quality of the optical and mechanical beam positioning system, and on the size of the pixels produced. In practice, with good focusing optics, it is possible to create pixels of size close to one wavelength,  $\lambda$ , of the engraving light, which is the theoretical limit for such a focusing process, and with a location accuracy of greater than  $\lambda/8$ . This is the same order of magnitude as that of CD pits, or of the resolution obtainable by currently known photographic processes. Such pixel size and location accuracy are thus sufficient for the production of volume holograms by the method of this invention.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description, taken in conjunction with the drawings in which:

Fig. 1 is a schematic illustration of a computer controlled system for the production of computer generated volume holograms, constructed and operative according to a preferred embodiment of the present invention;

Fig. 2 is a visual description of the geometrical elements underlying methods used mathematically to build a volumetric holographic array using the system of Fig. 1;

Fig. 3 is a schematic illustration of the production of a three-dimensional digital volume holograms containing iridescent 3-D images;

Fig. 4 is a schematic illustration of another preferred embodiment of the present invention, of a chromatic image, which can be seen from one viewer position;

Fig. 5 is a schematic illustration of another preferred embodiment of the present invention, showing a method for the production of a stereoscopic holographic image for two viewer positions, corresponding to the positions of a pair of human eyes; and

Fig. 6 schematically illustrates a further preferred embodiment of the present invention, by which an image viewable from multiple positions is constructed.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference is now made to Fig. 1, which illustrates schematically a computer controlled system for the production of computer generated volume holograms, constructed and operative according to a preferred embodiment of the present invention. A picosecond pulsed laser 1 emits a beam which is preferentially focused by means of a high quality optical system 2, into a transparent sample 3 in which the CGVH is to be produced. The laser pulse peak power, and the diffraction limit of the optical focusing system are such to ensure that the optical breakdown limit for the particular material of the sample is exceeded.

The sample is disposed on a CNC-controlled three-axis precision stage 4. The

motions along the X-Y-Z axes is executed by means of CNC motors 5, 6, 7. A computer 8 is operative to control all of the functions of the system, synchronizing the firing of the laser pulses with the motion of the X-Y-Z axes, such that the required volume pattern of scattering points is formed in accordance with a predefined program. The method by which the predefined program determines the location of each scattering center is now described hereinbelow.

According to another preferred embodiment of the present invention, there is provided a method of producing computer generated volume holograms by means of computing the required pixel arrangement for the holograph, and then utilizing a system such as that shown in Fig. 1 to create each pixel using optical breakdown laser engraving. Since they are computer generated, such volume holograms are also known as digital volume holograms. Up to this time, the applicants have not been aware of any comprehensive mathematical theory for the development of such 3-D gratings. The standard electromagnetic theory of gratings is developed with reference to the Dirichlet problem for solution of the Helmholtz equation with infinite boundary conditions and with Sommerfeld radiation conditions. In our case, however, there is no regular boundary with predefined field values. An analogy can be made with custom 3-D holograms or with the first order of the Guigense-Fresnel principle.

It is theoretically possible to calculate the complete interference pattern between the reference light beam and the light scattered by the object. For a hologram with dimensions of the order of  $1 \times 1 \times 1$  cm, and a resolution of the order of 200 pixels/mm, the hologram contains a total of  $8 \times 10^9$  pixels. It is thus necessary to perform about  $8 \times 10^9$  calculations for the interaction of each wave constituting the model field with each pixel. If the model field is represented as a set of plane waves, constituting typically one million components, the task of representing the whole of the model field can thus be estimated as requiring  $10^{15} - 10^{16}$  computations of exponential functions. Such a task would require more than one year of computing time on a current, non-parallel computer. It is therefore obvious that this rigorous approach is unsuitable for practical solution of the model field problem.

By taking in account the short spatial coherence length of sunlight, this task can be considerably simplified. Pixels can be logically integrated in independent clusters, each

WO 01/14937

PCT/IL00/00481

of which is responsible for creating one or more waves of the model field. Using an analogy with known custom hologram theory, every part of the hologram can be considered to memorize its own fragment of the whole interference pattern, but at the reconstruction step, use is made only of those parts of the interference pattern that have a small optical path difference between the reference and scattered field.

Let  $\bar{\mathbf{R}}_0$  and  $\bar{\mathbf{R}}_j$  be the radius vectors of the center point of the cluster and of the j-th pixel respectively. Let  $\bar{\mathbf{k}}$  be the wave vector of the reference field. Then the resulting scattered field in the direction of the viewpoint  $\bar{\mathbf{V}}$ , according to the Guigense-Fresnel principle, can be calculated as a sum of secondary waves:

$$\Phi = \sum_{j=0}^N \varepsilon_j e^{i\bar{\mathbf{k}}(\bar{\mathbf{R}}_0 + \bar{\mathbf{r}}_j)} \frac{e^{ikv_j}}{v_j} \quad (1)$$

where  $\bar{\mathbf{r}}_j = \bar{\mathbf{R}}_j - \bar{\mathbf{R}}_0$ ;

$\varepsilon_j$  is the scattered wave magnitude;

$\bar{\mathbf{v}}_j = \bar{\mathbf{V}} - \bar{\mathbf{R}}_j$  is the vector from the j-th pixel to the direction of viewing;

$v_j$  is the magnitude of this vector; and

$\bar{\mathbf{v}} = \bar{\mathbf{V}} - \bar{\mathbf{R}}_0$ .

In the far zone, when for any j magnitude,  $v = |\bar{\mathbf{v}}| \gg r_j$ , expression (1) can be written as:

$$\Phi(\bar{\mathbf{v}}) = \frac{1}{v} \sum_{j=0}^N \varepsilon_j e^{i\bar{\mathbf{k}}(\bar{\mathbf{R}}_0 + \bar{\mathbf{r}}_j)} e^{ik(v - \bar{\mathbf{v}}\bar{\mathbf{r}}_j/v)} = \frac{e^{i\bar{\mathbf{k}}\bar{\mathbf{R}}_0} e^{ikv}}{v} \sum_{j=0}^N \varepsilon_j e^{i(\bar{\mathbf{k}} - k\bar{\mathbf{v}}/v)\bar{\mathbf{r}}_j} \quad (2)$$

For a surface with a fixed magnitude of the vector  $\bar{\mathbf{v}}$ , there is a simple Fourier representation of any space field which is even in  $\bar{\mathbf{v}}$ , namely  $\Phi(\bar{\mathbf{v}}) = \Phi(-\bar{\mathbf{v}})^*$ . This means that for real values of  $\varepsilon_j$  a pair of images, one real and one virtual, are obtained.

Reference is now made to Fig. 2 which visually describes geometrical elements underlying the methods used mathematically to build the desired volumetric holographic array of pixels 20 within the transparent media 22. In order to calculate the spatial arrangement and scattering effect of the pixels, the field of the light scattered from the object should be calculated at the viewer's position 24. To do this, a mathematical description of the object must be created. This is called the virtual object 26. The

WO 01/14937

PCT/IL00/00481

incident light 30 is scattered by the pixels, and the waves of the scattered components from all of the pixels constitute the model field.

It is possible to assign the contribution of the light scattered from each pixel cluster to the waves of the model field. For example, the virtual object can be considered to be divided into small elements, hereinafter called facets. The size of the facets depends on the desired resolution. Consider a set of clusters 28, 29, located behind the virtual object 26 when seen from the viewer's position 24 through object facets 31, 32. Each cluster contributes to the waves from all the facets 31, 32, of the virtual object that can be observed from the viewer's position in the direction of that cluster. Thus, for instance, cluster 28 should produce a wave that simulates the wave reflected or radiated from the virtual object facet 31, and so on. The resulting diffraction from all of the clusters in the volume hologram produces a set of waves that simulates the reflection or scattering from the virtual object. This simplifies the calculations, since the scattered waves and the model field then have the same phase surfaces. There are three degrees of freedom, two of which are used to build the desired  $\Phi(\vec{v})$  in equation (2) at the viewer's position for a fixed wave vector  $\vec{k}$  of the reference field, and one of which is needed to select the necessary magnitude of  $\vec{k}$  from the white reference field to build a chromatic image.

Three-dimensional digital volume holograms can be produced by several other methods according to more preferred embodiments of the present invention. In one preferred embodiment, illustrated in Fig. 3, the polychromatic iridescent effects arising from periodic structures are used to produce specific iridescent 3-D images inside transparent materials. This is performed by constructing 3-D images 40 from small clusters 42, periodically arranged within the transparent medium 44. Each cluster represents a fragment of a 3-D image, with its facet and color dependent on the directions of the incident light 46 and the viewer position 48. The position of each cluster is the same as the position of its corresponding facet.

Fig. 4 is a schematic illustration of another preferred embodiment of the present invention, wherein a chromatic image 50, which can be seen correctly from only one viewer position 52, is created from a plane array of clusters 54. This is achieved by arranging pixels in clusters in the form of a simple diffraction grating 54, so as to diffract

the desired wavelength of the incident light 56 in the direction of the viewer position 52. Each cluster contributes only one wavelength, but all have the same effective diffraction lattice, but each with a different orientation with respect to the viewer position. Therefore, each cluster represents a different facet 58 of the 3-D image, its color depending on the illumination direction and viewer position. The position of each cluster defines the position of a corresponding facet in the image, such that the facet lies on a straight line from the viewer to the cluster.

Yet another preferred embodiment of the present invention is illustrated in the schematic drawing of Fig. 5, which shows the production of a stereoscopic holographic image. This is achieved by constructing the hologram for two viewer positions, corresponding to the positions of a pair of human eyes 60. The grating 62 associated with each cluster is then a superposition of two simple lattices. This only affects the number of clusters or the Fourier composition of each cluster. Each cluster 63 represents up to two facets 64, 66, of a 3-D image. Corresponding facets lie on the lines from cluster to viewer eye positions. Each cluster contributes up to two wavelengths of the image, according to the predetermined illumination direction and viewer positions. Some clusters do not contribute anything to the image, since they are not located behind the virtual object with respect to either of the viewer eye positions; some of them contribute only one wavelength because only for one viewer position are they behind the virtual object; some of them contribute two wavelengths, since they are both correctly located with respect to lines drawn from the viewer's eyes through the virtual object. This concept can be visualized more clearly by analogy with the shadow of an object formed from two sources of light located at the viewer's eye positions. There will be regions with two shadows, with one shadow and without any shadow. This is analogous to the distribution of the contributions of each cluster to the image.

Reference is now made to Fig. 6, which schematically illustrates a further preferred embodiment of the present invention, by which an image viewable from multiple positions is constructed. Fig. 6 shows, as an example, a CGVH constructed so that when illuminated from a predetermined direction 72, each cluster 74 scatters the light so as to produce a range of facets 76 in the virtual object, thus forming an image which is viewable from a range of azimuthal positions  $\phi$ , having the same tilt angle  $\theta$





## CLAIMS

We claim:

1 A method of producing in a solid transparent material, a hologram of an object, comprising the steps of:

developing a three-dimensional mathematical model of an electro-magnetic field emanating from said object, said field producing an image of said object;

computing a corresponding three-dimensional set of points, light scattered from which reconstructs said field; and

focusing a pulsed laser beam into said solid transparent material onto each of said points sequentially, said beam being capable, when focused, of causing optical breakdown damage in said solid transparent material.

2. The method of claim 1 and wherein said object is a real object.

3. The method of claim 1 and wherein said object is a virtual object.

4. The method of any of claims 1 to 3 and also including the step of arranging said set of points as a set of diffraction lattices.

5. The method of claim 4 and wherein said set of diffraction lattices are such that light diffracted therefrom forms a three-dimensional colored image.

6. The method of claim 4 and wherein said set of diffraction lattices are such that light diffracted therefrom forms a stereo image.

7. The method of claim 4 and wherein said set of diffraction lattices are such that light diffracted therefrom forms an image capable of being viewed from a plurality of angles.

WO 01/14937

PCT/IL00/00481

8 The method of claim 1 and wherein said set of points are arranged as a holographic optical element.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
1 March 2001 (01.03.2001)

PCT

(10) International Publication Number  
**WO 01/14937 A1**


- (51) International Patent Classification<sup>7</sup>: G03H 1/08
- (21) International Application Number: PCT/IL00/00481
- (22) International Filing Date: 7 August 2000 (07.08.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
131575 24 August 1999 (24.08.1999) IL
- (71) Applicant (for all designated States except US): U.C. LASER LTD. [IL/IL]; P.O. Box 351, Industrial Zone, 21613 Carmiel (IL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): GULETSKY, Nikolay Nikolaevich [RU/RU]; Apt. 232, Metallistov Avenue,

82, St. Petersburg (RU). DMITRIEV, Vladimir Yurevich [RU/RU]; Apt. 227, Kazakov Street, 32, St. Petersburg, 198332 (RU). OSHEMKOV, Sergey Viktorovich [RU/RU]; Apt. 29, Shakhmatov Street, 14, St. Petersburg, 98904 (RU).

- (74) Agents: COLB, Sanford, T. et al.; Sanford T. Colb & Co., P.O. Box 22, 76122 Rehovot (IL).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European

[Continued on next page]

(54) Title: VOLUME HOLOGRAMS IN TRANSPARENT MATERIALS

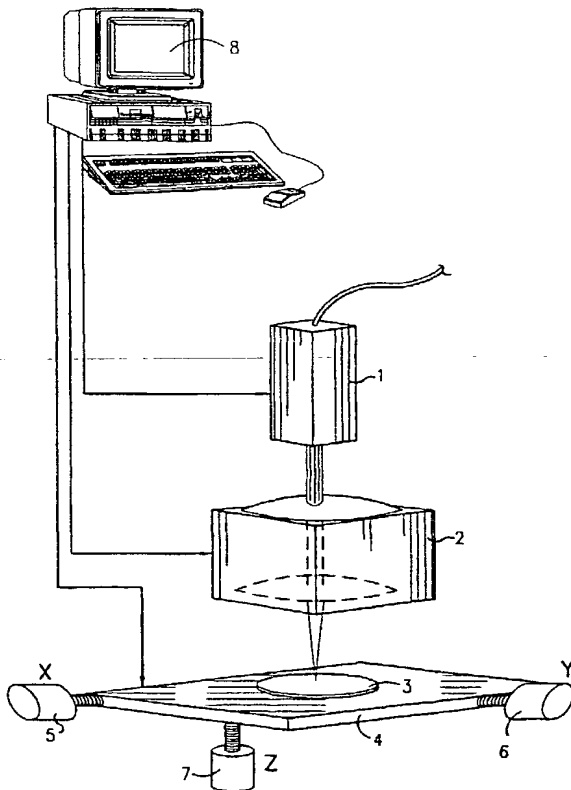

(57) Abstract: This invention discloses a method of producing, in a solid transparent material (3), a hologram of an object; the method includes the steps of: developing a three-dimensional mathematical model of an electro-magnetic field emanating from the object, the field producing an image of the object; computing a corresponding three-dimensional set of points, light scattered from which reconstructs the field; and focusing a pulsed laser beam into the solid transparent material onto each of the points sequentially, the beam being capable, when focused, of causing optical breakdown in the solid transparent material.

WO 01/14937 A1



patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

— Before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments.


**Published:**

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

1/4

FIG. 1

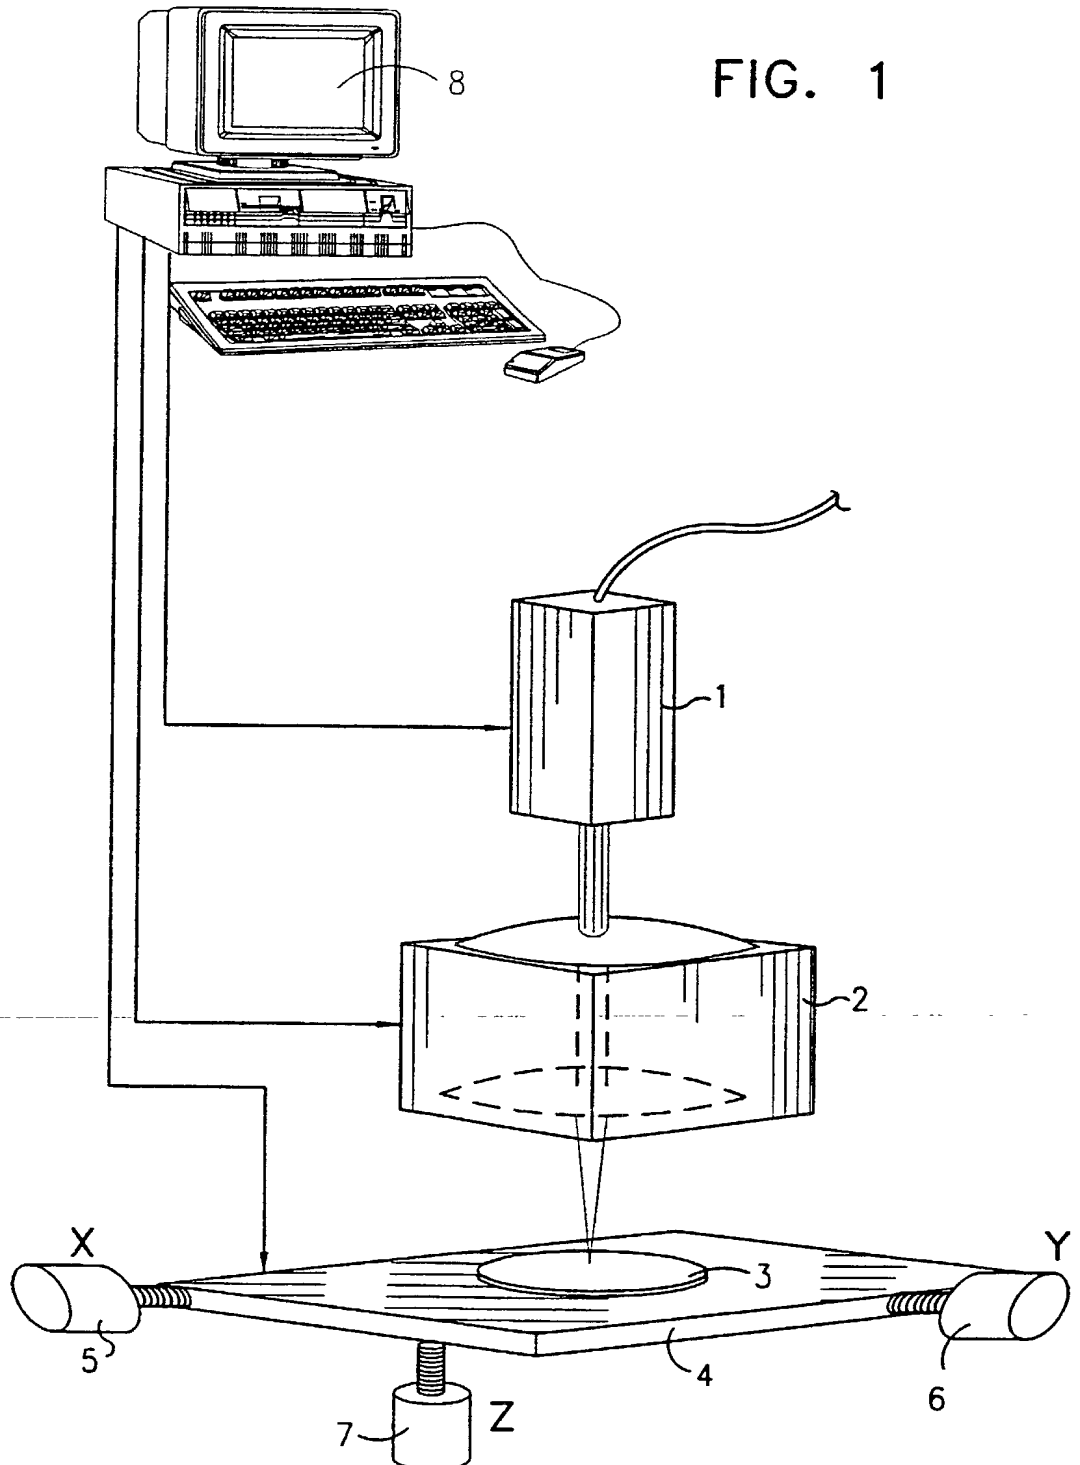

2/4


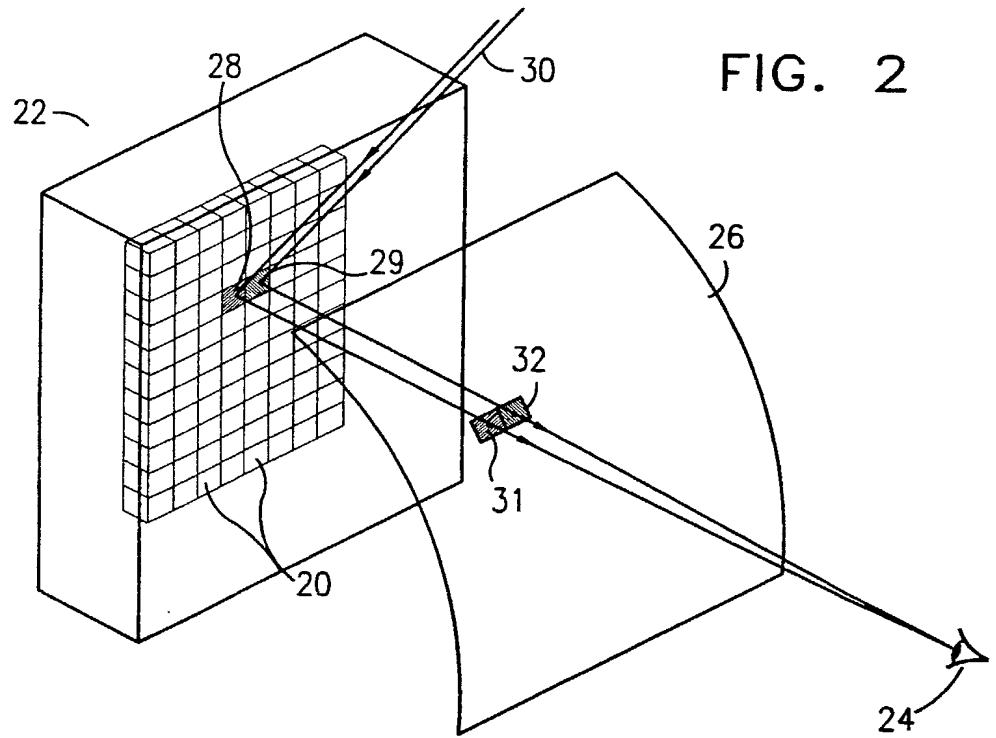


FIG. 3

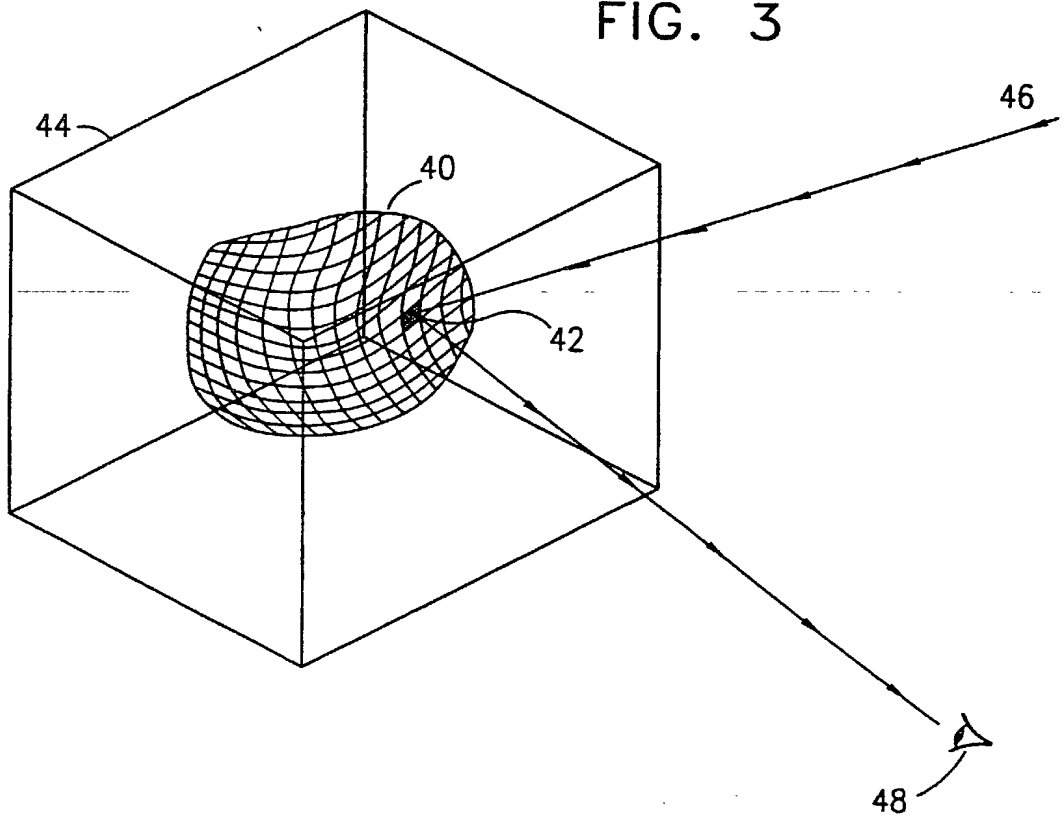

3/4

FIG. 4

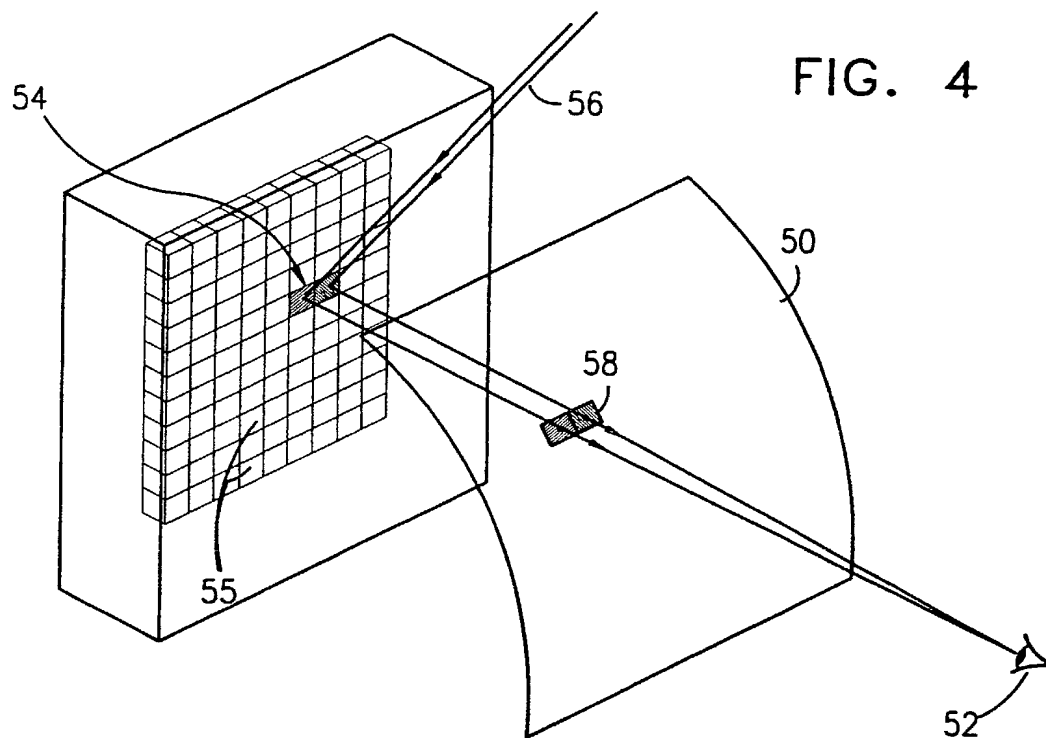


FIG. 5


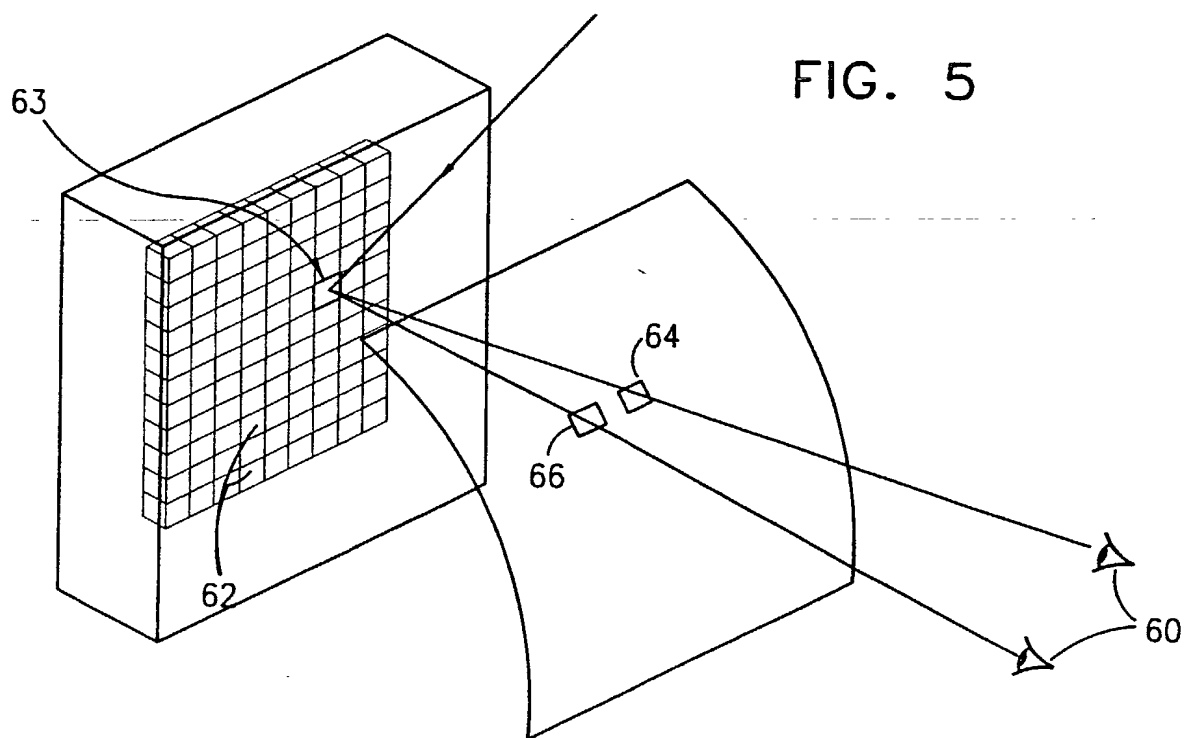




FIG. 6

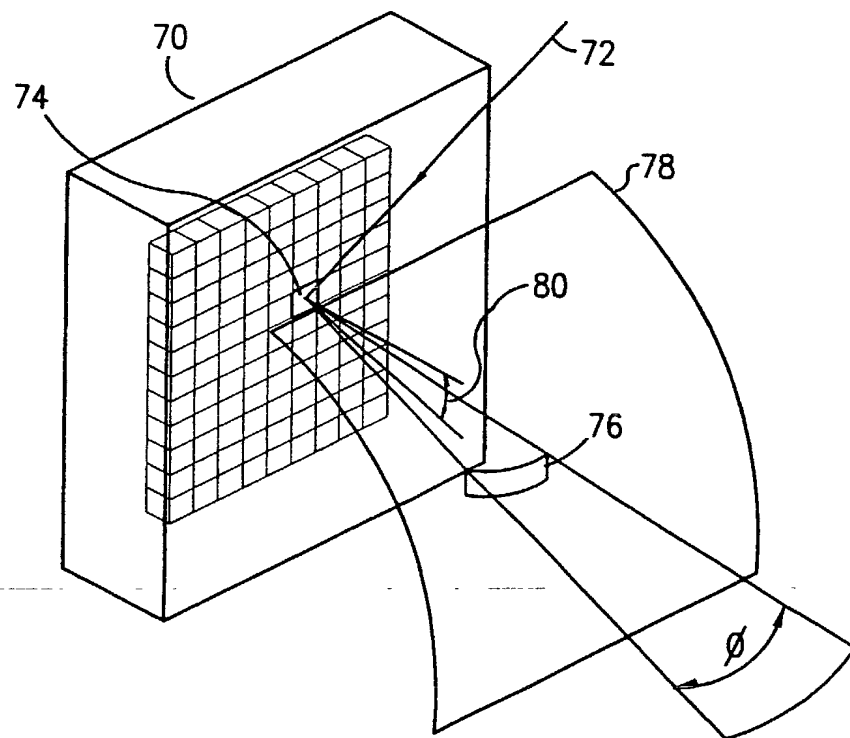

15-JUL-2002 MON 10:26

FAX NO.

P. 02/04

COLB-203

**DECLARATION/POWER OF ATTORNEY**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**VOLUME HOLOGRAMS IN TRANSPARENT MATERIALS**

the specification of which:

( ) is attached hereto.

(X) was filed on February 20, 2002 as U. S. Serial No. 10/069,253

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>131575</u>	<u>Israel</u>	<u>24/08/1999</u>	<u>Xcs (X) No ( )</u>
(Number)	(Country)	(Day/Month/Year Filed)	Priority Claimed

**U.S. Priority Applications**

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of the application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to

18-JUL-2002 MON 10:28

FAX NO.

P. 03/04

COLB-203

disclose material information as defined in Title 37, Code of Federal Regulations, Section §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>PCT/IL00/00481</u>	<u>August 7, 2000</u>	<u>Pending</u>
(Applic. Serial No.)	(Filing Date)	(Status patented/pending/abandoned)
<u>                    </u>	<u>                    </u>	<u>                    </u>
(Applic. Serial No.)	(Filing Date)	(Status patented/pending/abandoned)

Power of Attorney

I hereby appoint the following attorneys to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: John E. Lynch, Reg. No. 20,940; Peter F. Felle, Reg. No. 20,297; Norman D. Hanson, Reg. No. 30,946; John A. Bauer, Reg. No. 32,554; James Zubok, Reg. No. 38,671; James R. Crawford, Reg. No. 39,155; C. Andrew Im, Reg. No. 40,657; and David Rubin, Reg. No. 40,314, my attorneys with full power of substitution and revocation. Address all telephone calls to James R. Crawford, (212) 318-3148. Address all correspondence to James R. Crawford, Esq. at

PULBRIGHT & JAWORSKI L.L.P.  
666 Fifth Avenue  
New York, NY 10103

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(1) Nikolay Nikolaevich GULITSKY  
Full Name/Sole or First Inventor

Signature

Date

Residence: Apt. 232, Metallistov Avenue 782  
St. Petersburg, Russia

Citizenship: RU

Post Office Address: same

15-JUL-2002 MON 10:27

FAX NO.

P. 04/04

COLB-203

20  
(2) Vladimir Yurevich DMITRIEV

Full Name/Second Inventor

[Signature]  
Signature

15.07.2002  
Date

Residence: Apt. 227, Kazakov Street, 32  
St. Petersburg, Russia

Citizenship: RU

Post Office Address: same

(3) Sergey Viktorovich OSHEMKOV

Full Name/Third Inventor

[Signature]  
Signature

X 15.07.2002  
Date

Residence: Apt. 29, Shakmatov Street, 14  
St. Petersburg, Russia

Citizenship: RU

Post Office Address: same